

TR-550 Unit

Feature:

- ✧ Front Mounted unit and slim evaporator design
- ✧ Strong refrigerating, cooling fast
- High-strength plastic enclosure, elegant appearance
- ✧ Compact structure, small size, light weight and fuel savings

Control system

DC voltage 12V/24V

Digital Control Panel

Application

Small refrigerated trucks or vans

Warranty Summary

Specific terms of the Guchen warranty are available on request.



Driect Driven Refrigeration Unit

Temperature rating in container	-20~30℃
Cooling Capacity	0℃ 5800 w -20℃ 3000 w
Application Box Volume	20~30 m³
Voltage and Total Current	DC12V / DC24V

Compressor

Brand	QUE
Model	QP16
Displacement	163cc/r

Refrigerant

Type	R404A
Amount	3.8 kg

Evaporator

Type	Hydrophilic aluminum foil with internal ridge copper tube
Dimension	1224*508*278 mm
Fan motor	Axial type
No. of fan motor	2 pcs


Condenser

Type	Micro-Channels Parallel flow tube
Dimension	1456*540*505 mm
Fan motor	Axial type
No. of fan motor	2 pcs

Optional & function

Standby	AC220V/1Ph/50Hz ,AC380V/3Ph/50Hz
Heating	Hot gas defrosting heating

Specification are subject to change without priority notice. For specific model performance data, capacities, and other technical information, contact GUCHEN service man or your local factory representative

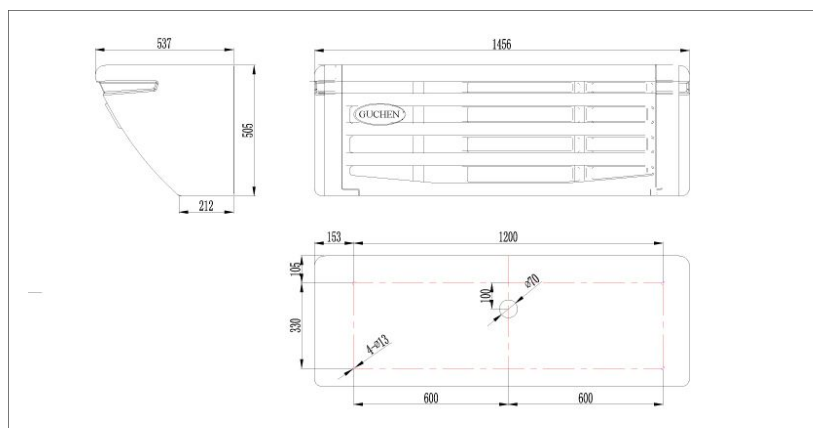

Zhengzhou Guchen Industry Co.,Ltd.

Add: 129 Huanghe Road, Zhengzhou City, Henan
P.R.China.

Tel: +86 371 6915 2892

Fax: +86 371 6915 2894

Email: info@guchen.com

<http://www.guchen.com>

Best not only better quality of the first customers
first.